


## SP45H Spring Check Valves

### Features and Options

- Prevents product backflow
- Electro-polished spring
- Metal on metal seat
- All Stainless steel construction (T316L)
- Buna body seal



### Dimensions and Technical Data

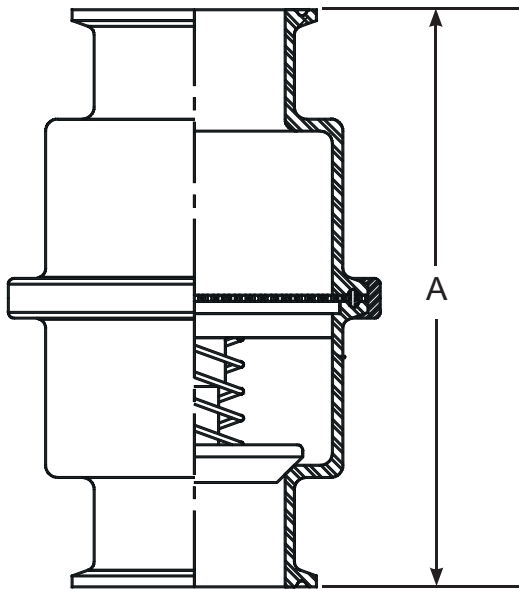

Valve Dimensions	
Size	A.
1.5"	5 3/8"
2"	5 7/16"
2.5"	7 11/16"
3"	7 15/16"

- 3 PSIG Cracking Pressure
- 150 PSIG Max. Pressure
- 250°F Max. Temperature

\*\*\* Valve must be installed vertically \*\*\*

