


SP56-360° Sight Glass

- Bodies are manufactured from T316L stainless steel
- T304 Hardware and Fasteners
- Pressure Range - Up to 300 PSI (see below)
- Temperature Range - 450°F Max.(see below)
- 360° viewable glass
- Available with Pyrex Glass or Acrylic Sight Tube
- Material certification available upon request

Dimensions		
Size	A.	
	3" Glass	6" Glass
1.5"	6.50"	9.50"
2.0"	6.50"	9.50"
2.5"	6.50"	9.50"
3.0"	6.50"	9.50"

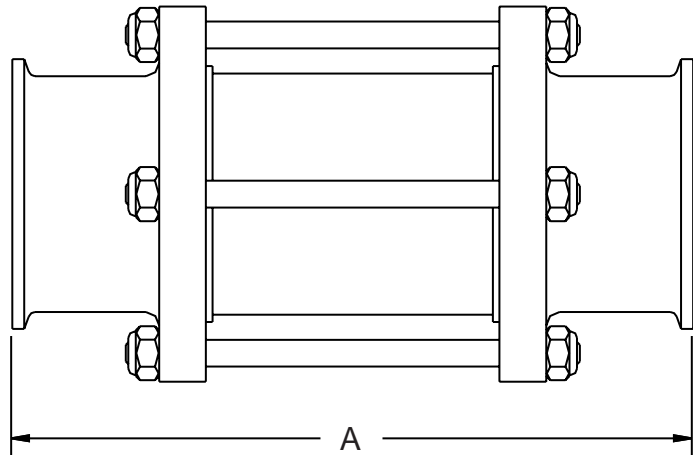

Pyrex Tube		
Pressure and Temperature		
Size	Max. PSI	Max. Temp
1.5"	150 PSI	450°F
2.0"	150 PSI	450°F
2.5"	120 PSI	450°F
3.0"	100 PSI	450°F

Acrylic Tube *		
Pressure and Temperature		
Size	Max. PSI	Max. Temp
1.5"	200 PSI	150°F
2.0"	275 PSI	150°F
2.5"	300 PSI	150°F
3.0"	250 PSI	150°F

* Note that Acrylic Tube is not 3A Approved

