

## SP62 Air Blow Check Valves

### Features and Options


- All stainless steel constructions (T316L)
- Precision molded plug assures positive shut-off
- Seat material include:
  - Buna
  - EPDM
  - Viton
- 1.0 micron filter



### Ordering Information


When ordering specify size of clamp connection (1.5" thru 4.5") and type of air inlet adapter

- SP62A- Quick Coupler Adapter
- SP62B- 1" Rubber Hose Adapter
- SP62C- 3/8" Female NPT

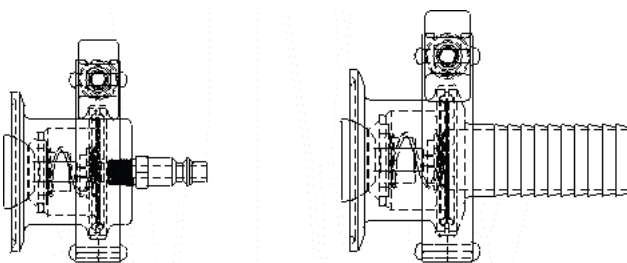


SP62A

SP62B



SP62C

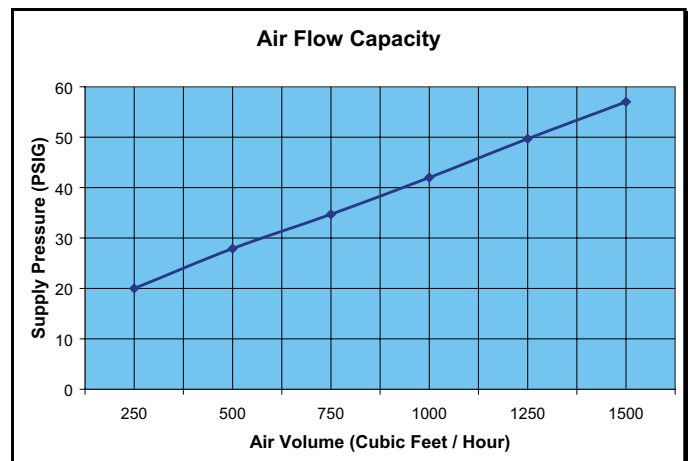

Max. Temp 300°F

#### Note:

When ordering air blow check valves with SPI ball check valves, order as follows:

2.5" Air Blow for 1.5" and 2" Ball Check Valves

4" Air Blow for 2.5" and 3" Ball Check Valves

4.5" Air Blow for Tri-Clover® 45BYMP-3"

